



AlGaInP Amber Chip TC712UA


1. Product Description:

TC712UA is an amber LED chip fabricated from aluminum gallium indium phosphide (AlGaInP). The chip has optimized current-spreading and good thermal resistance capable of producing high light output provides excellent readability under sunlight and dependable performance. TC712UA AlGaInP LED chip is ideal for use in indoor / outdoor LED application with value adding and energy saving features.

2. Features:

- ◆ Ultra Amber
- ◆ AlGaInP/GaAs
- ◆ Super High Brightness
- ◆ Indoor/Outdoor Applications

3. Chip Dimensions and Structure:

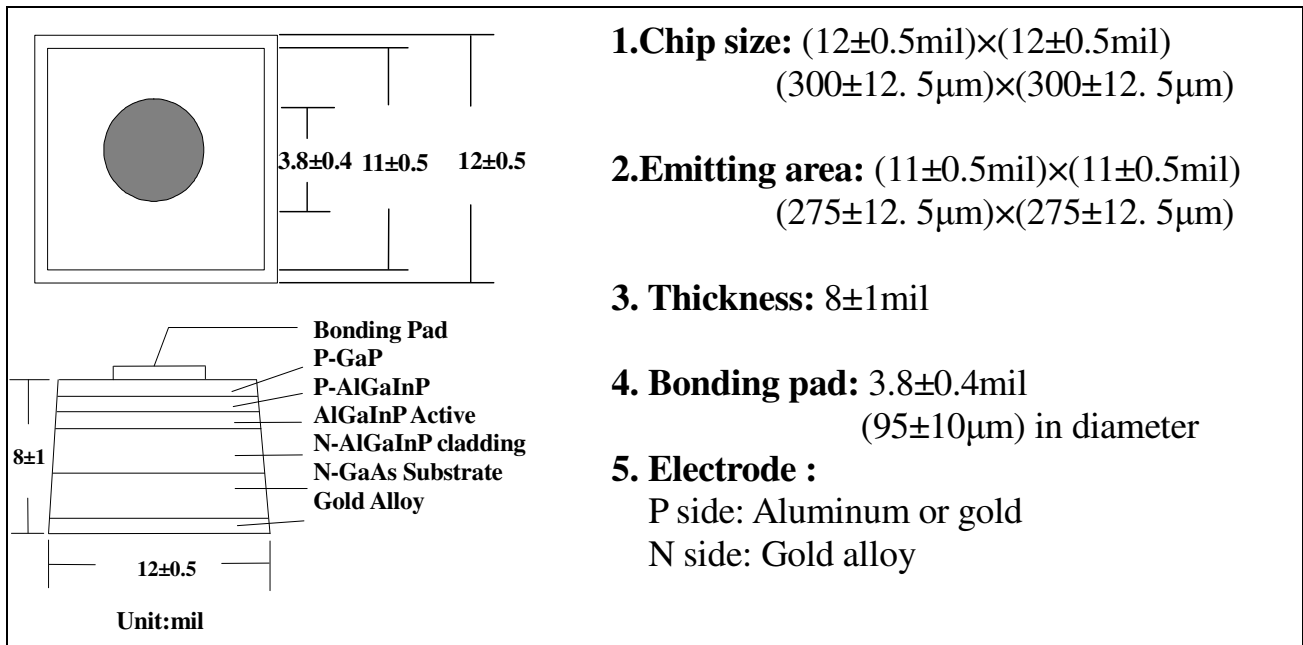

1. Chip size: $(12 \pm 0.5 \text{ mil}) \times (12 \pm 0.5 \text{ mil})$
 $(300 \pm 12.5 \mu\text{m}) \times (300 \pm 12.5 \mu\text{m})$

2. Emitting area: $(11 \pm 0.5 \text{ mil}) \times (11 \pm 0.5 \text{ mil})$
 $(275 \pm 12.5 \mu\text{m}) \times (275 \pm 12.5 \mu\text{m})$

3. Thickness: $8 \pm 1 \text{ mil}$

4. Bonding pad: $3.8 \pm 0.4 \text{ mil}$
 $(95 \pm 10 \mu\text{m})$ in diameter

5. Electrode :
P side: Aluminum or gold
N side: Gold alloy



4. Electro-optical Characteristics at 25°C:

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Forward Voltage	V_F	-	2.0	2.3	V	$I_F=20\text{mA}$
Reverse Voltage	V_R	5	-	-	V	$I_R=10\mu\text{A}$
Leakage current	I_r	-	-	1	μA	$V_r=9\text{V}$
Wavelength	λ_D	600	605	611	nm	$I_F=20\text{mA}$
Luminous Intensity	I_v	-	※	-	mcd	$I_F=20\text{mA}$

- Rank 07 : $70 \leq I_v(\text{min}) < 80\text{mcd}$
- Rank 08 : $80 \leq I_v(\text{min}) < 90\text{mcd}$
- Rank 09 : $90 \leq I_v(\text{min}) < 100\text{mcd}$
- Rank 10 : $100 \leq I_v(\text{min}) < 110\text{mcd}$
- Rank 11 : $110 \leq I_v(\text{min}) < 120\text{mcd}$
- Rank 12 : $120 \leq I_v(\text{min}) < 130\text{mcd}$

5. Absolute Maximum Ratings:

Parameter	Symbol	Condition	Rating
Forward DC current	I_f	$T_a=25^\circ\text{C}$	$\leq 50\text{mA}$
Junction Temp	T_j	---	$\leq 115^\circ\text{C}$
Reverse Voltage	V_r	$T_a=25^\circ\text{C}$	$\leq 10\text{V}$
Storage Temp	T_{stg}	chip	$-40 \sim 85^\circ\text{C}$
		chip on tape/storage	$0 \sim 30^\circ\text{C}$ $\text{RH} \leq 60\%$
		chip on tape/transportation	$-20 \sim 50^\circ\text{C}$
Temp during packaging	---	---	Max 265°C ($\leq 15\text{sec}$)

Note:

- 1) Using the maximum rated current or voltage, is used as a single chip, and is a limit on the PCB board and no glue, independent constant-current source driver. Higher than the rated conditions, P-N junction temperature higher than 115°C can lead to damage of the LED chip.
- 2) Under the condition of maximum 265°C high temperature used only for 15 seconds, high temperature or time is too long, can cause damage to the chip.
- 3) The best storage conditions of Blue tape is placed in the shade dry environment, Indoor temperature is not higher than 30°C , Relative humidity below 60%, shelf life is 1 year.



Uni Light Technology Inc.

■Tel : 0769-87631888 ■Fax : 0769-87631888-166

6.Characteristic Curves:

Remark: These are the typical TC712UA measured values, along with different brightness and wavelength, the actual value is slightly different.

Fig1. Forward Current vs. Forward Voltage:

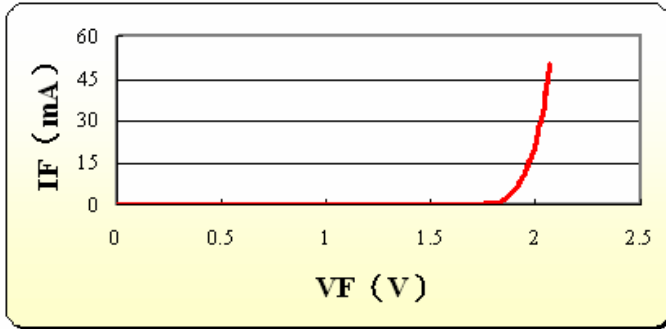


Fig2. Forward Current vs. Relative Intensity:

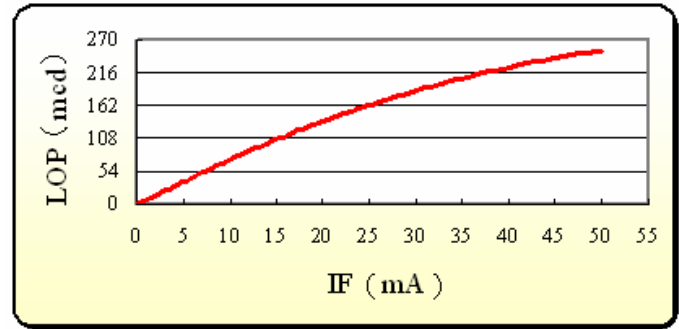


Fig3. Forward Current vs. Relative Wavelength:

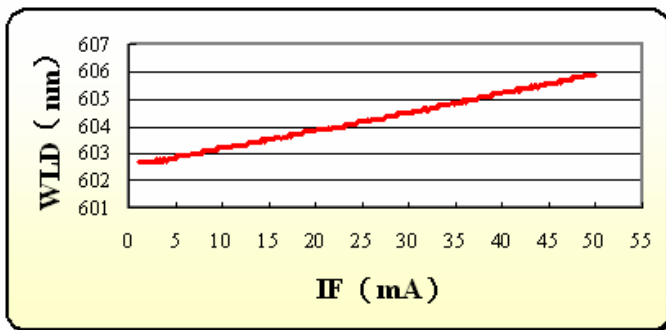


Fig4. Life Test at 20mA R.T. 1000hrs:

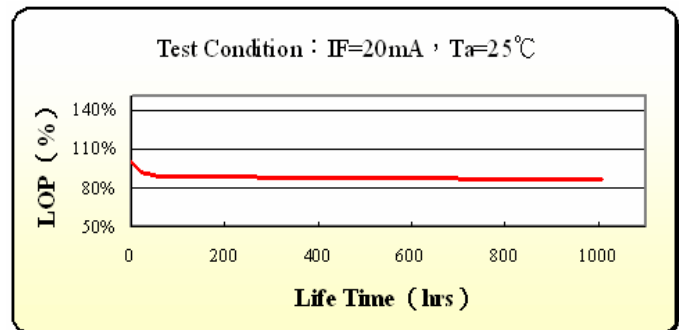


Fig5. Temperature vs. Relative Wavelength:


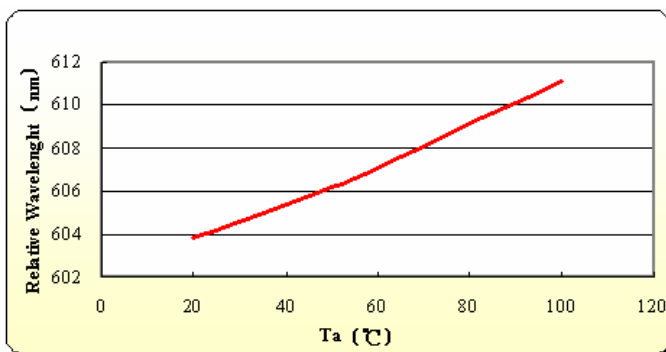


Fig6. Temperature vs. Relative Intensity:

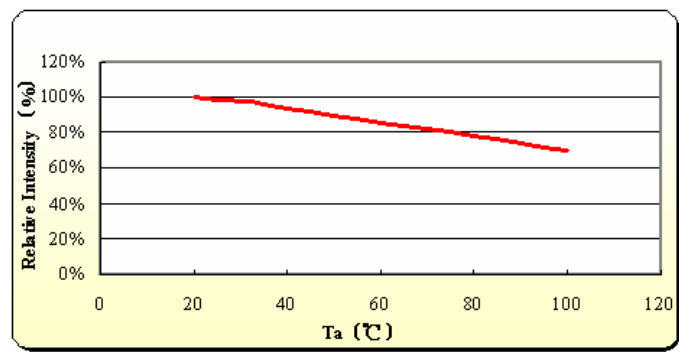

Uni Light Technogloy Inc.

■Tel : 0769-87631888 ■Fax : 0769-87631888-166